
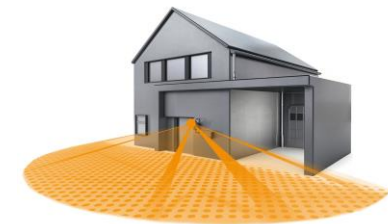


Movement detector IS 180-2

An intelligent unit. In form and function.

- 180° detection angle with 12m range
- Ideal for monitoring big areas like entrances, gardens and yards
- Elegant design product for wall installation incl. accessory for corner mounting
- Limiting the detection area possible via blind covers
- Available in colours white, black, silver and anthracite

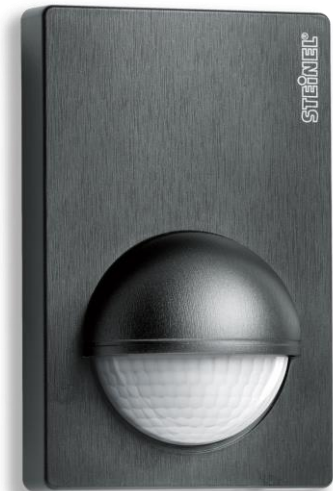

Movement detector IS 180-2

An intelligent unit. In form and function.

Technical Data

Dimensions(HxBxL):	Ø 120 x 76 x 56 mm
Voltage:	230-240V, 50/60 Hz
Sensor-Technology:	Passiv-Infrared
Detection angle:	180° with 90° aperture angle
Detection range:	2 basic settings: max . 12m or 5m
Mounting:	wall, corner
Switching capacity:	max.1000 W (ohmic load, ex: traditional light bulbs) max. 6 LEDs , C ≤ 132µF
Twilight settings:	2 - 2000 Lux
Time settings:	10 sec. – 15 mins.
IP-/Protection class:	IP 54 / II
Material:	UV resistant plastic
Accessory:	incl. corner mounting brackets



EAN	Art.-No.	Bezeichnung Description
4007841 603212	603212	Movement detector IS 180-2 white
4007841 603618	603618	Movement detector IS 180-2 silver
4007841 603113	603113	Movement detector IS 180-2 black